

ALV2-P series / LOCK

Handle & Color Variation



ALV2-P□476-3 (ST)

ALV2-P□66-3 (BS)

The pressed stainless steel escutcheon is available as standard in 5 high-quality finishes.

Type 478 Handle



Satin Stainless Steel Finish (ST)
Key Override available as an option.

Type 66 Handle



Polished Stainless Steel Finish (SB)

Type 67 Handle



Satin Brass Finish (BS)

Type 74 Handle



Polished Brass Finish (YB)

Type 476 Handle



Mid Bronze Finish (CB)


MIWA LOCK CO., LTD.

JAPAN 3-1-12, Shiba, Minato-ku, Tokyo 105-8510
TEL : +81-3-3452-5568 FAX : +81-3-3452-5911 URL : www.miwa-lock.biz

U.S.A 9272 Jeronimo, Suite 119, Irvine CA 92618
TEL : +1-949-328-5280 / Toll free : +1-888-412-9750 FAX : +1-949-328-5281 URL : www.miwalock.com

U.K Lincoln House, Waterside Court, Neptune Close, Medway City Estate, Rochester, Kent ME2 4NZ
TEL : +44-1634-296869 FAX : +44-1634-296992 URL : www.miwa-lock.biz

Detail Drawing

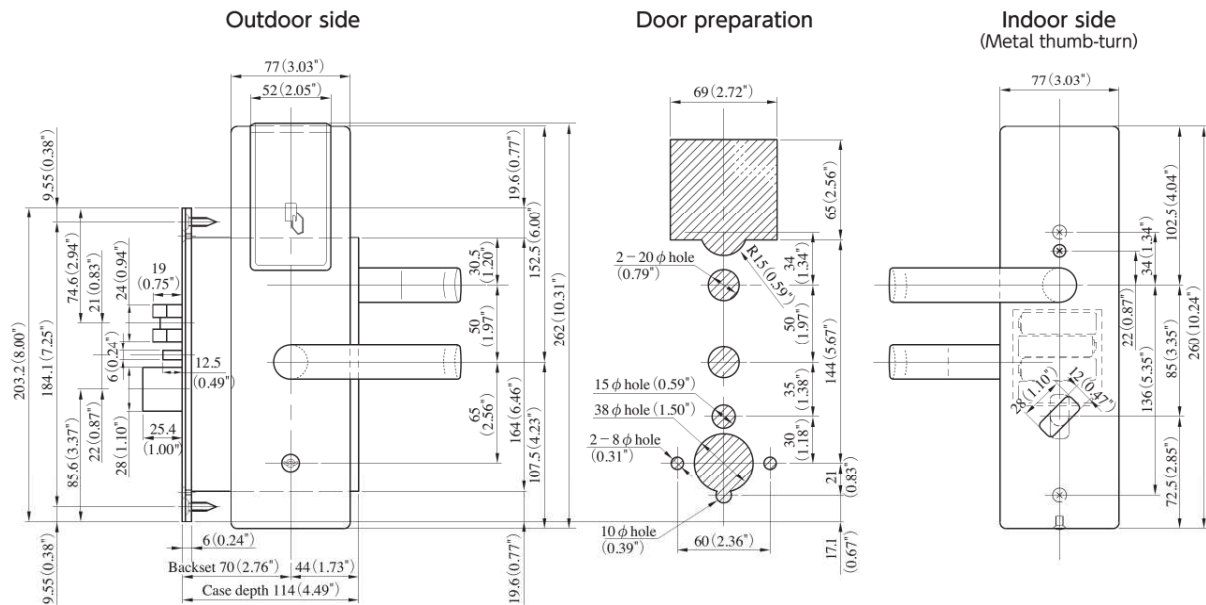

Features & Specifications

- ◆ Compatible with ALV2 system software
- ◆ RFID Mifare Classic (ISO 14443 Type A) guest 1K & UL, staff 4K
- ◆ NFC equipped for use with mobile devices
- ◆ PMS and POS interface ready
- ◆ Sealed electronics suitable for interior and exterior applications
- ◆ ADA compliant levers and thumb-turn
- ◆ UL fire listed up to 3 hours
- ◆ FCC and CE certified compliant
- ◆ Suitable for guest rooms, staff areas, and common doors
- ◆ 600 event's on lock audit (non-volatile Flash memory)
- ◆ Visual LED, green, red, & yellow with optional audible signal
- ◆ 140 event's on staff credentials (keycard, fob, wrist band)
- ◆ Staff credentials have day-of-week and time-of-day programming
- ◆ IrDA wireless programming - no cable connection or port on lock
- ◆ Emergency Card overrides deadbolt in use
- ◆ Standard warranty three years, extended warranty plans available

Product Name	ALV2-P Without cylinder: ALV2-P□*-3 With cylinder: ALV2-P□*-1
Product Number	□ = D:27mm, G:32mm * = Mountable handle
Mountable Handles	66 • 67 • 74 • 476 • 478
Cylinders (optional)	U9 Satin Stainless Steel (ST) (grade 304) Polished Stainless Steel (SB) (grade 304)
Material / Finish	Satin Brass (BS) Polished Brass (YB) Mid Bronze (CB)
Power Supply	4-AA alkaline batteries, normal battery life two years
Door Thickness	1.38" to 2.17" (35mm to 55mm)
Backset	2- 3/4" (70mm)
Lock Options	ANSI 156.25-2007 & ANSI 156.13-2005 certified compliant Anti-panic function - deadbolt and latch retract automatically Automatic deadbolt optional
Handing	Factory Handed: left, right, left reverse, right reverse
Weight	Approx. 10 lbs.
Environmental Conditions	Operating temperature 32°F to 104°F (0°C to 40°C) Range of humidity: 35% to 85% RH IP44 certified compliant